


# CxV-15 AIR SOURCE HEAT PUMP WATER HEATER



## STANDARD FEATURES:

- 15 HP compressor
- Available in 460/60/3
- 140°F (60°C) output down to 10°F (-12°C)
- 130°F (54°C) output down to 0°F (-18°C)
- Quiet and efficient large diameter ECM Fan
- 304L stainless steel frame and enclosure
- Double wall 316L stainless steel condenser
- Integrated stainless steel circulator pump
- Industrial PLC with color touchscreen
- Expandable in arrays of up to twelve units with internal controls including temperature output control, lead-lag, staging, run hour balancing, dynamic VFD staging, 0-10VDC custom output for auxiliary equipment control (ie. booster pumps, louvers, etc)
- BACnet and Modbus via MSTP or built in Ethernet
- Intelligent defrost, trace tape, and pan heater included
- Machine suitable for outdoor applications
- Fits in standard construction elevators and hoist
- NSF/ANSI 61 rated

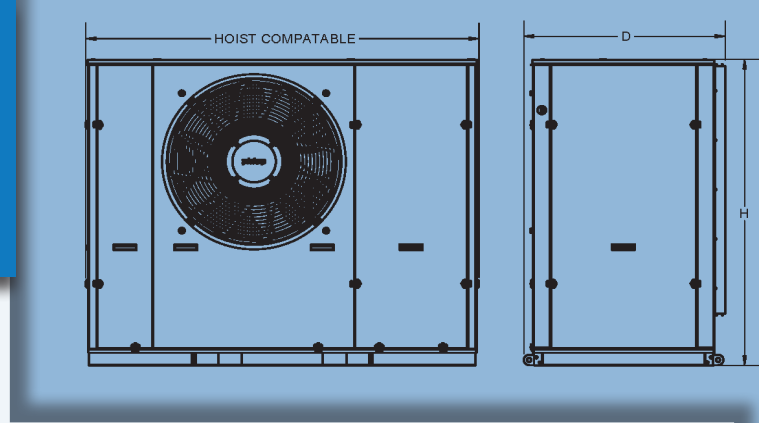


## AVAILABLE OPTIONS:

- Header assemblies and single point electrical distribution for multiple unit installations
- Single wall condensers for hydronic heating
- Secondary heat exchangers for pool heating
- Remote Monitoring via, ethernet, Wi-Fi, or cellular



Made In the USA

LEAD FREE  
NSF/ANSI 61



**COLMAC**  
WATERHEAT  
A division of Colmac Industries

sales@colmacwaterheat.com / colmacwaterheat.com  
401 N Lincoln • PO Box 72, Colville, WA. 99114 USA  
Tel: (509) 684-4505 / Toll Free: (800) 926-5622 / FAX: (509) 684-4500